



Precision Metal Film Resistors

Materials and Features:

- EIA standard color coding
- Flame retardant type available
- Low noise & Voltage coefficient
- Low temperature coefficient
- Wide precision range in small package
- Very low or very high ohmic values available upon request
- Nichrome resistor element provides stable performance in various environments
- Multiple epoxy coating on vacuum-deposited metal film provides superior moisture protection

Explanation of Part Numbers:

MF 25 C 1001 F T XX
 1 2 3 4 5 6 7

1 Style:

MF - Metal Film

2 Wattage:

08 = 1/8 watt 25 = 1/4 watt 40 = .4 watt 50 = 1/2 watt
 60 = .6 watt 100 = 1 watt 200 = 2 watt

3 Temperature Coefficient:

T = ± 15 ppm *C = ± 50 ppm (Std)
 E = ± 25 ppm D = ± 100 ppm

* Standard TC provided unless otherwise specified in part number.

4 Nominal Resistance Value:

E24 Series (5% Tolerance)

The first two digits are significant figures of resistance and the third digit denotes the number of zeros (decimal point is expressed by the letter "R").

i.e. 102 = 1k Ω
 1R2 = 1.2 Ω

E96 Series (1% Tolerance)

The first three digits are significant figures of resistance and the fourth digit denotes the number of zeros.

i.e. 1001 = 1kΩ
 10R0 = 10Ω

5 Tolerance:

A = ± .05% B = ± .1% C = ± .25%
 D = ± .5% F = ± 1% G = ± 2% J = ± 5%

6 Packaging:


T = Tape & Reel B = Bulk
 TB = Tape & Box A = Ammo

7 Lead Forming:

PN = Panasert Type PA1 = Avisert Type 1
 PA2 = Avisert Type 2 PA3 = Avisert Type 3

* For all other requests, please consult factory.

Dimension:

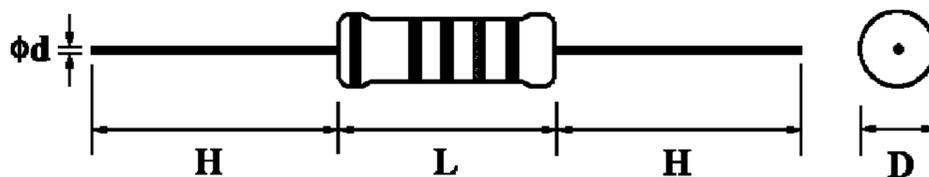

Precision Metal Film Resistors


Normal Size						Small Size					
Style	Power Rating at 70°C	Dimension (mm)				Style	Power Rating at 70°C	Dimension (mm)			
		D Max.	L Max.	d ^{+0.02} _{-0.05}	H±3			D Max.	L Max.	d ^{+0.02} _{-0.05}	H±3
MF08	1/8W (0.125W)	1.85	3.5	0.5	28	MF25S	1/4W (0.25W)	1.85	3.5	0.5	28
MF25	1/4W (0.25W)	2.5	6.8	0.6	28	MF40SS	0.4W	1.9	3.7	0.5	28
MF50	1/2W (0.5W)	3.5	10.0	0.6	28	MF50S	1/2W (0.5W)	3.0	9.0	0.6	28
MF100	1W	5.0	12.0	0.7	28	MF50SS	1/2W (0.5W)	2.5	6.8	0.6	28
MF200	2W	5.5	16.0	0.8	28	MF60S	0.6W	2.5	6.8	0.6	28

General Specification


Style	Dielectric Withstanding Voltage	Max. Working Voltage	Max. Overload Voltage	Resistance Tolerance	T.C.R.	Resistance Range	Special Order		
							Resistance Tolerance	T.C.R.	
MF08	400V	200V	400V	±5%	±200PPM/°C	1Ω ~ 22.1MΩ	±0.25%	±15PPM/°C	
MF25S				±2%	±100PPM/°C	1Ω ~ 22.1MΩ		±25PPM/°C	
MF40SS				±1%	±50PPM/°C	1Ω ~ 22.1MΩ		±50PPM/°C	
MF25	500V	250V	500V	±5%	±200PPM/°C	1Ω ~ 22.1MΩ	±0.1%	±15PPM/°C	
MF60S				±2%	±100PPM/°C	1Ω ~ 22.1MΩ		±25PPM/°C	
MF50SS				±1%	±50PPM/°C	1Ω ~ 22.1MΩ		±50PPM/°C	
MF50	500V	350V	500V	±5%	±200PPM/°C	1Ω ~ 22.1MΩ	±0.1%	±15PPM/°C	
MF50S				700V	±2%	±100PPM/°C		1Ω ~ 22.1MΩ	±25PPM/°C
					±1%	±50PPM/°C		1Ω ~ 22.1MΩ	±50PPM/°C
MF100	1000V	500V	1000V	±5%	±200PPM/°C	1Ω ~ 10MΩ	±0.1%	±15PPM/°C	
MF200					±2%	±100PPM/°C		1Ω ~ 10MΩ	±25PPM/°C
					±1%	±50PPM/°C		1Ω ~ 10MΩ	±50PPM/°C

Note: MF - xx - SS is Non-Flame coating.
 * MF200 Series is only available up to 1M Ω


Current Noise Level:

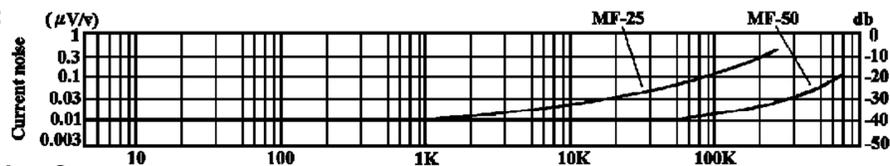

Derating Curve:

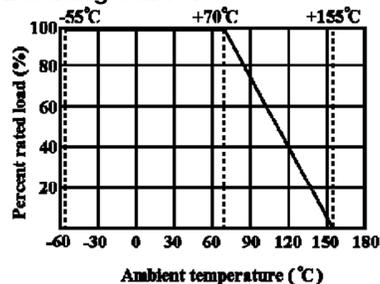

Load Life: * Only for your reference

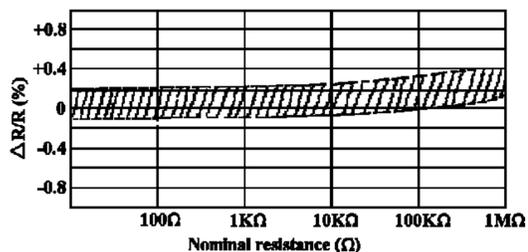



Precision Metal Film Resistors

Performance Specifications

Characteristics	Test Methods	Limits															
Temperature coefficient JIS - C - 5202 5.2	Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1 (t_2 - t_1)} \times 10^6 \text{ (PPM / } ^\circ\text{C)}$ R ₁ : Resistance value at room temperature (t ₁) R ₂ : Resistance value at room temp. plus 100 °C (t ₂)	± 350 PPM / °C															
Dielectric withstanding voltage JIS - C - 5202 5.7	Resistors shall be clamped in the trough of a 90° metallic V- block and shall be tested at AC potential respectively specified in the above list for 60+ 10 / -0 seconds.	No evidence of flashover, mechanical damage, arcing or insulation break down.															
Temperature cycling JIS - C - 5202 7.4	Resistance change after continuous five cycles for duty cycle specified below:	Resistance change rate is ± 2% + 0.05Ω). No evidence of mechanical damage															
	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55°C ± 3°C</td> <td>30 minutes</td> </tr> <tr> <td>2</td> <td>Room temp</td> <td>10~15 minutes</td> </tr> <tr> <td>3</td> <td>+ 155°C ± 3°C</td> <td>30 minutes</td> </tr> <tr> <td>4</td> <td>Room temp</td> <td>10~15 minutes</td> </tr> </tbody> </table>		Step	Temperature	Time	1	-55°C ± 3°C	30 minutes	2	Room temp	10~15 minutes	3	+ 155°C ± 3°C	30 minutes	4	Room temp	10~15 minutes
	Step		Temperature	Time													
	1		-55°C ± 3°C	30 minutes													
	2		Room temp	10~15 minutes													
3	+ 155°C ± 3°C	30 minutes															
4	Room temp	10~15 minutes															
Short - time overload JIS - C - 5202 5.5	Permanent resistance change after the application of a potential of 2.5 times RCWV or the max. overload voltage respectively specified in the above list, whichever less for 5 seconds.	Resistance change rate is N: ± (1% + 0.05Ω) S: ± (2% + 0.05Ω) No evidence of mechanical damage															
Pulse overload JIS - C - 5202 5.8	Resistance change after 10,000 cycles (1 second "on", 25 seconds "off") at 4 times RCWV or the max. pulse overload voltage.	Resistance change rate is N: ± (2% + 0.05Ω) S: ± (5% + 0.05Ω) No evidence of mechanical damage															
Load life in humidity JIS - C - 5202 7.9	Resistance change after 1,000 hours (1.5 hours "on" 0.5 hour "off") at RCWV in a humidity chamber controlled at 40°C ± 2°C and 90 to 95% relative humidity.	<table border="1"> <thead> <tr> <th>Resistance value</th> <th>▲R/R</th> </tr> </thead> <tbody> <tr> <td>Less than 100KΩ</td> <td>± 5%</td> </tr> <tr> <td>100KΩ or more</td> <td>± 10%</td> </tr> </tbody> </table>	Resistance value	▲R/R	Less than 100KΩ	± 5%	100KΩ or more	± 10%									
Resistance value	▲R/R																
Less than 100KΩ	± 5%																
100KΩ or more	± 10%																
Load life JIS - C - 5202 7.10	Permanent resistance change after 1,000 hours operating at RCWV, with duty cycle of 1.5 hours "on", 0.5 hour "off" at 70°C ± 2°C ambient.	<table border="1"> <thead> <tr> <th>Resistance value</th> <th>▲R/R</th> </tr> </thead> <tbody> <tr> <td>Less than 100KΩ</td> <td>± 5%</td> </tr> <tr> <td>100KΩ or more</td> <td>± 10%</td> </tr> </tbody> </table>	Resistance value	▲R/R	Less than 100KΩ	± 5%	100KΩ or more	± 10%									
Resistance value	▲R/R																
Less than 100KΩ	± 5%																
100KΩ or more	± 10%																
Terminal strength JIS - C - 5202 6.1	Direct load : Resistance to a 2.5 kgs direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test : Terminal leads shall be bent through 90 at point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.	No evidence of mechanical damage															
Resistance to soldering heat JIS - C - 5202 6.4	Permanent resistance change when leads immersed to 3.2 mm to 4.8 mm from the body in 350°C ± 10°C solder for 3 ± 0.5 seconds	Resistance change rate is ± (1% + 0.05W). No evidence of mechanical damage															
Solderability JIS - C - 5202 6.5	The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. of solder : 235°C ± 5°C Dwell time in solder : 3 + 0.5 / - 0 seconds	95% coverage Min.															
Resistance to solvent JIS - C - 5202 6.9	Specimens shall be immersed in a bath of trichloroethane completely for 3 minutes with ultrasonic.	No deterioration of protective coatings and markings															
Flame retardant JIS - C - 5202 7.12	Resistors shall resist flaming or arcing when overloaded up to 16 times RCWV.	No evidence of flaming or arcing															

*RCWV = Rated Continuous Working Voltage = $\sqrt{\text{Rated Power} \times \text{Resistance Value}}$